



SP2F / 2날 플랫엔드밀

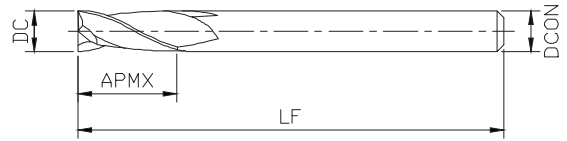

- Cu · SUS · 45C ~ 50HRC에서 탁월한 성능 발휘!
- 新 RADIA 코팅 적용으로 高품질 · 長수명 실현!
- 날끝 Touch 추가로 안정적 가공 지향

주문번호 EDP No.	외경 DC	전장 LF	날길이 APMX	자루경 DCON
SP2FX0P15X0P3	0.15	40	0.3	4
SP2FX0P2X0P4	0.2	40	0.4	4
SP2FX0P25X0P5	0.25	40	0.5	4
SP2FX0P3X0P6	0.3	40	0.6	4
SP2FX0P35X0P7	0.35	40	0.7	4
SP2FX0P4X0P8	0.4	40	0.8	4
SP2FX0P45X0P9	0.45	40	0.9	4
SP2FX0P5X1	0.5	40	1	4
SP2FX0P55X1P1	0.55	40	1.1	4
SP2FX0P6X1P2	0.6	40	1.2	4
SP2FX0P65X1P3	0.65	40	1.3	4
SP2FX0P7X1P4	0.7	40	1.4	4
SP2FX0P75X1P5	0.75	40	1.5	4
SP2FX0P8X1P6	0.8	40	1.6	4
SP2FX0P85X1P7	0.85	40	1.7	4
SP2FX0P9X1P8	0.9	40	1.8	4
SP2FX0P95X2	0.95	40	2	4
SP2FX1X2P5	1	50	2.5	6
SP2FX1P1X3	1.1	50	3	6
SP2FX1P2X3	1.2	50	3	6
SP2FX1P5X4	1.5	50	4	6
SP2FX2X6	2	50	6	6
SP2FX2P5X7	2.5	50	7	6
SP2FX3X8	3	50	8	6
SP2FX3P5X10	3.5	50	10	6
SP2FX4X10	4	50	10	6
SP2FX4P5X12	4.5	50	12	6
SP2FX5X15	5	60	15	6
SP2FX5P5X15	5.5	60	15	6
SP2FX6X15	6	60	15	6
SP2FX6P5X18	6.5	60	18	8
SP2FX7X20	7	60	20	8
SP2FX7P5X20	7.5	60	20	8
SP2FX8X20	8	70	20	8
SP2FX8P5X22	8.5	70	22	10
SP2FX9X22	9	70	22	10
SP2FX9P5X24	9.5	70	24	10
SP2FX10X25	10	75	25	10
SP2FX10P5X26	10.5	75	26	12
SP2FX11X30	11	75	30	12

SP2F / 2날 플랫엔드밀

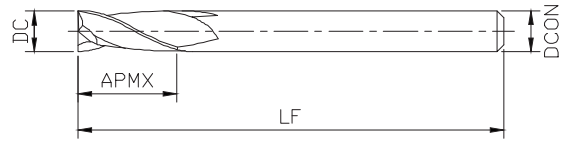

- Cu · SUS · 45C ~ 50HRC에서 탁월한 성능 발휘!
- 新 RADIA 코팅 적용으로 高품질 · 長수명 실현!
- 날끝 Touch 추가로 안정적 가공 지향

주문번호 EDP No.	외경 DC	전장 LF	날길이 APMX	자루경 DCON
SP2FX12X30	12	80	30	12
SP2FX13X35	13	100	35	12
SP2FX14X35	14	100	35	16
SP2FX15X38	15	100	38	16
SP2FX16X40	16	100	40	16
SP2FX17X42	17	100	42	16
SP2FX18X45	18	100	45	16
SP2FX19X45	19	100	45	20
SP2FX20X45	20	100	45	20
SP2FX21X45	21	100	45	20
SP2FX22X45	22	100	45	20
SP2FX23X50	23	120	50	25
SP2FX24X50	24	120	50	25
SP2FX25X50	25	120	50	25