


## S2 / 2날 롱넥 코너R



- Cu · SUS · 45C ~ 50HRC에서 탁월한 성능 발휘!
- 新 RADIA 코팅 적용으로 高품질 · 長수명 실현!
- 코너 래디우스 FACET Shape 적용으로 공구강성 극대화

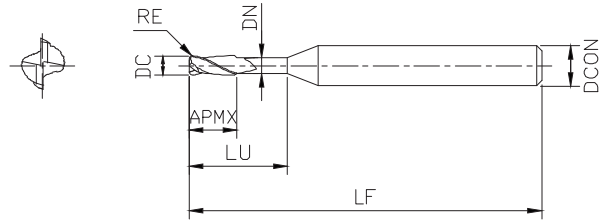


주문번호 EDP No.	외경 X 유효장 X 코너R DC X LU X RE				전장 LF	날길이 APMX	자루경 DCON	목부경 DN
S2XP4X1XP05	0.4	X	1	X R0.05	45	0.6	4	0.37
S2XP4X1X0P1	0.4	X	1	X R0.1	45	0.6	4	0.37
S2XP4X1P5XP05	0.4	X	1.5	X R0.05	45	0.6	4	0.37
S2XP4X1P5X0P1	0.4	X	1.5	X R0.1	45	0.6	4	0.37
S2XP4X2XP05	0.4	X	2	X R0.05	45	0.6	4	0.37
S2XP4X2X0P1	0.4	X	2	X R0.1	45	0.6	4	0.37
S2XP4X2P5XP05	0.4	X	2.5	X R0.05	45	0.6	4	0.37
S2XP4X2P5X0P1	0.4	X	2.5	X R0.1	45	0.6	4	0.37
S2XP4X3XP05	0.4	X	3	X R0.05	45	0.6	4	0.37
S2XP4X3X0P1	0.4	X	3	X R0.1	45	0.6	4	0.37
S2XP4X4XP05	0.4	X	4	X R0.05	45	0.6	4	0.37
S2XP4X4X0P1	0.4	X	4	X R0.1	45	0.6	4	0.37
S2XP5X1XP05	0.5	X	1	X R0.05	45	0.7	4	0.45
S2XP5X1X0P1	0.5	X	1	X R0.1	45	0.7	4	0.45
S2XP5X1P5XP05	0.5	X	1.5	X R0.05	45	0.7	4	0.45
S2XP5X1P5X0P1	0.5	X	1.5	X R0.1	45	0.7	4	0.45
S2XP5X2XP05	0.5	X	2	X R0.05	45	0.7	4	0.45
S2XP5X2X0P1	0.5	X	2	X R0.1	45	0.7	4	0.45
S2XP5X2P5XP05	0.5	X	2.5	X R0.05	45	0.7	4	0.45
S2XP5X2P5X0P1	0.5	X	2.5	X R0.1	45	0.7	4	0.45
S2XP5X3XP05	0.5	X	3	X R0.05	45	0.7	4	0.45
S2XP5X3X0P1	0.5	X	3	X R0.1	45	0.7	4	0.45
S2XP5X4XP05	0.5	X	4	X R0.05	45	0.7	4	0.45
S2XP5X4X0P1	0.5	X	4	X R0.1	45	0.7	4	0.45
S2XP5X5XP05	0.5	X	5	X R0.05	45	0.7	4	0.45
S2XP5X5X0P1	0.5	X	5	X R0.1	45	0.7	4	0.45
S2XP5X6XP05	0.5	X	6	X R0.05	45	0.7	4	0.45
S2XP5X6X0P1	0.5	X	6	X R0.1	45	0.7	4	0.45
S2XP6X2XP05	0.6	X	2	X R0.05	45	0.9	4	0.55
S2XP6X2X0P1	0.6	X	2	X R0.1	45	0.9	4	0.55
S2XP6X2X0P2	0.6	X	2	X R0.2	45	0.9	4	0.55
S2XP6X3XP05	0.6	X	3	X R0.05	45	0.9	4	0.55
S2XP6X3X0P1	0.6	X	3	X R0.1	45	0.9	4	0.55
S2XP6X3X0P2	0.6	X	3	X R0.2	45	0.9	4	0.55
S2XP6X4XP05	0.6	X	4	X R0.05	45	0.9	4	0.55
S2XP6X4X0P1	0.6	X	4	X R0.1	45	0.9	4	0.55
S2XP6X4X0P2	0.6	X	4	X R0.2	45	0.9	4	0.55
S2XP6X6XP05	0.6	X	6	X R0.05	45	0.9	4	0.55
S2XP6X6X0P1	0.6	X	6	X R0.1	45	0.9	4	0.55
S2XP6X6X0P2	0.6	X	6	X R0.2	45	0.9	4	0.55

## S2 / 2날 롱넥 코너R



- Cu · SUS · 45C ~ 50HRC에서 탁월한 성능 발휘!
- 新 RADIA 코팅 적용으로 高품질 · 長수명 실현!
- 코너 래디우스 FACET Shape 적용으로 공구강성 극대화

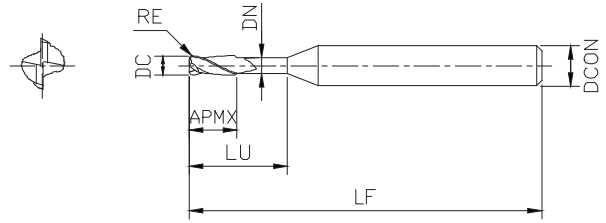

주문번호 EDP No.	외경 X 유효장 X 코너R DC X LU X RE				전장 LF	날길이 APMX	자루경 DCON	목부경 DN
S2XP6X8XP05	0.6	X	8	X R0.05	45	0.9	4	0.55
S2XP6X8XP01	0.6	X	8	X R0.1	45	0.9	4	0.55
S2XP6X8XP02	0.6	X	8	X R0.2	45	0.9	4	0.55
S2XP6X10XP05	0.6	X	10	X R0.05	45	0.9	4	0.55
S2XP6X10XP01	0.6	X	10	X R0.1	45	0.9	4	0.55
S2XP6X10XP02	0.6	X	10	X R0.2	45	0.9	4	0.55
S2XP7X2XP05	0.7	X	2	X R0.05	45	1	4	0.65
S2XP7X2XP01	0.7	X	2	X R0.1	45	1	4	0.65
S2XP7X2XP02	0.7	X	2	X R0.2	45	1	4	0.65
S2XP7X4XP05	0.7	X	4	X R0.05	45	1	4	0.65
S2XP7X4XP01	0.7	X	4	X R0.1	45	1	4	0.65
S2XP7X4XP02	0.7	X	4	X R0.2	45	1	4	0.65
S2XP7X6XP05	0.7	X	6	X R0.05	45	1	4	0.65
S2XP7X6XP01	0.7	X	6	X R0.1	45	1	4	0.65
S2XP7X6XP02	0.7	X	6	X R0.2	45	1	4	0.65
S2XP7X8XP05	0.7	X	8	X R0.05	45	1	4	0.65
S2XP7X8XP01	0.7	X	8	X R0.1	45	1	4	0.65
S2XP7X8XP02	0.7	X	8	X R0.2	45	1	4	0.65
S2XP7X10XP05	0.7	X	10	X R0.05	45	1	4	0.65
S2XP7X10XP01	0.7	X	10	X R0.1	45	1	4	0.65
S2XP7X10XP02	0.7	X	10	X R0.2	45	1	4	0.65
S2XP8X2XP05	0.8	X	2	X R0.05	45	1.2	4	0.75
S2XP8X2XP01	0.8	X	2	X R0.1	45	1.2	4	0.75
S2XP8X2XP02	0.8	X	2	X R0.2	45	1.2	4	0.75
S2XP8X3XP05	0.8	X	3	X R0.05	45	1.2	4	0.75
S2XP8X3XP01	0.8	X	3	X R0.1	45	1.2	4	0.75
S2XP8X3XP02	0.8	X	3	X R0.2	45	1.2	4	0.75
S2XP8X4XP05	0.8	X	4	X R0.05	45	1.2	4	0.75
S2XP8X4XP01	0.8	X	4	X R0.1	45	1.2	4	0.75
S2XP8X4XP02	0.8	X	4	X R0.2	45	1.2	4	0.75
S2XP8X6XP05	0.8	X	6	X R0.05	45	1.2	4	0.75
S2XP8X6XP01	0.8	X	6	X R0.1	45	1.2	4	0.75
S2XP8X6XP02	0.8	X	6	X R0.2	45	1.2	4	0.75
S2XP8X8XP05	0.8	X	8	X R0.05	45	1.2	4	0.75
S2XP8X8XP01	0.8	X	8	X R0.1	45	1.2	4	0.75
S2XP8X8XP02	0.8	X	8	X R0.2	45	1.2	4	0.75
S2XP8X10XP05	0.8	X	10	X R0.05	45	1.2	4	0.75
S2XP8X10XP01	0.8	X	10	X R0.1	45	1.2	4	0.75
S2XP8X10XP02	0.8	X	10	X R0.2	45	1.2	4	0.75
S2X1X2XP05	1	X	3	X R0.05	45	1.5	4	0.95

제품 특징

STEEL-PRO


STEEL-PRO+

절삭 조건

## S2 / 2날 롱넥 코너R



- Cu · SUS · 45C ~ 50HRC에서 탁월한 성능 발휘!
- 新 RADIA 코팅 적용으로 高품질 · 長수명 실현!
- 코너 래디우스 FACET Shape 적용으로 공구강성 극대화

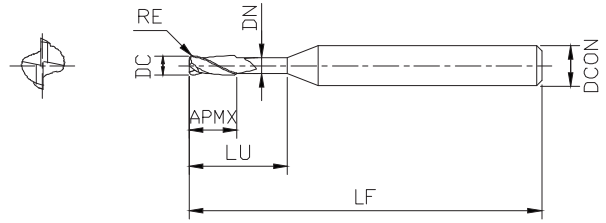


주문번호 EDP No.	외경 X 유효장 X 코너R DC X LU X RE				전장 LF	날길이 APMX	자루경 DCON	목부경 DN
S2X1X3X0P1	1	X	3	X R0.1	45	1.5	4	0.95
S2X1X3X0P2	1	X	3	X R0.2	45	1.5	4	0.95
S2X1X3X0P3	1	X	3	X R0.3	45	1.5	4	0.95
S2X1X4XP05	1	X	4	X R0.05	45	1.5	4	0.95
S2X1X4X0P1	1	X	4	X R0.1	45	1.5	4	0.95
S2X1X4X0P2	1	X	4	X R0.2	45	1.5	4	0.95
S2X1X4X0P3	1	X	4	X R0.3	45	1.5	4	0.95
S2X1X6XP05	1	X	6	X R0.05	45	1.5	4	0.95
S2X1X6X0P1	1	X	6	X R0.1	45	1.5	4	0.95
S2X1X6X0P2	1	X	6	X R0.2	45	1.5	4	0.95
S2X1X6X0P3	1	X	6	X R0.3	45	1.5	4	0.95
S2X1X8XP05	1	X	8	X R0.05	45	1.5	4	0.95
S2X1X8X0P1	1	X	8	X R0.1	45	1.5	4	0.95
S2X1X8X0P2	1	X	8	X R0.2	45	1.5	4	0.95
S2X1X8X0P3	1	X	8	X R0.3	45	1.5	4	0.95
S2X1X10XP05	1	X	10	X R0.05	45	1.5	4	0.95
S2X1X10X0P1	1	X	10	X R0.1	45	1.5	4	0.95
S2X1X10X0P2	1	X	10	X R0.2	45	1.5	4	0.95
S2X1X10X0P3	1	X	10	X R0.3	45	1.5	4	0.95
S2X1X12XP05	1	X	12	X R0.05	45	1.5	4	0.95
S2X1X12X0P1	1	X	12	X R0.1	45	1.5	4	0.95
S2X1X12X0P2	1	X	12	X R0.2	45	1.5	4	0.95
S2X1X12X0P3	1	X	12	X R0.3	45	1.5	4	0.95
S2X1X14XP05	1	X	14	X R0.05	50	1.5	4	0.95
S2X1X14X0P1	1	X	14	X R0.1	50	1.5	4	0.95
S2X1X14X0P2	1	X	14	X R0.2	50	1.5	4	0.95
S2X1X14X0P3	1	X	14	X R0.3	50	1.5	4	0.95
S2X1X16XP05	1	X	16	X R0.05	50	1.5	4	0.95
S2X1X16X0P1	1	X	16	X R0.1	50	1.5	4	0.95
S2X1X16X0P2	1	X	16	X R0.2	50	1.5	4	0.95
S2X1X16X0P3	1	X	16	X R0.3	50	1.5	4	0.95
S2X1X20XP05	1	X	20	X R0.05	50	1.5	4	0.95
S2X1X20X0P1	1	X	20	X R0.1	50	1.5	4	0.95
S2X1X20X0P2	1	X	20	X R0.2	50	1.5	4	0.95
S2X1X20X0P3	1	X	20	X R0.3	50	1.5	4	0.95
S2X1P2X4XP05	1.2	X	4	X R0.05	45	1.5	4	1.15
S2X1P2X4X0P1	1.2	X	4	X R0.1	45	1.5	4	1.15
S2X1P2X4X0P2	1.2	X	4	X R0.2	45	1.5	4	1.15
S2X1P2X4X0P3	1.2	X	4	X R0.3	45	1.5	4	1.15
S2X1P2X6XP05	1.2	X	6	X R0.05	45	1.5	4	1.15

## S2 / 2날 롱넥 코너R



- Cu · SUS · 45C ~ 50HRC에서 탁월한 성능 발휘!
- 新 RADIA 코팅 적용으로 高품질 · 長수명 실현!
- 코너 래디우스 FACET Shape 적용으로 공구강성 극대화

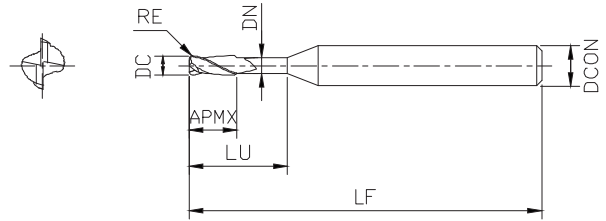


주문번호 EDP No.	외경 X 유효장 X 코너R DC X LU X RE				전장 LF	날길이 APMX	자루경 DCON	목부경 DN
S2X1P2X6X0P1	1.2	X	6	X R0.1	45	1.5	4	1.15
S2X1P2X6X0P2	1.2	X	6	X R0.2	45	1.5	4	1.15
S2X1P2X6X0P3	1.2	X	6	X R0.3	45	1.5	4	1.15
S2X1P2X8XP05	1.2	X	8	X R0.05	45	1.5	4	1.15
S2X1P2X8X0P1	1.2	X	8	X R0.1	45	1.5	4	1.15
S2X1P2X8X0P2	1.2	X	8	X R0.2	45	1.5	4	1.15
S2X1P2X8X0P3	1.2	X	8	X R0.3	45	1.5	4	1.15
S2X1P2X10XP05	1.2	X	10	X R0.05	45	1.5	4	1.15
S2X1P2X10X0P1	1.2	X	10	X R0.1	45	1.5	4	1.15
S2X1P2X10X0P2	1.2	X	10	X R0.2	45	1.5	4	1.15
S2X1P2X10X0P3	1.2	X	10	X R0.3	45	1.5	4	1.15
S2X1P2X12XP05	1.2	X	12	X R0.05	45	1.5	4	1.15
S2X1P2X12X0P1	1.2	X	12	X R0.1	45	1.5	4	1.15
S2X1P2X12X0P2	1.2	X	12	X R0.2	45	1.5	4	1.15
S2X1P2X12X0P3	1.2	X	12	X R0.3	45	1.5	4	1.15
S2X1P5X4XP05	1.5	X	4	X R0.05	45	2.3	4	1.45
S2X1P5X4X0P1	1.5	X	4	X R0.1	45	2.3	4	1.45
S2X1P5X4X0P2	1.5	X	4	X R0.2	45	2.3	4	1.45
S2X1P5X4X0P3	1.5	X	4	X R0.3	45	2.3	4	1.45
S2X1P5X4X0P5	1.5	X	4	X R0.5	45	2.3	4	1.45
S2X1P5X6XP05	1.5	X	6	X R0.05	45	2.3	4	1.45
S2X1P5X6X0P1	1.5	X	6	X R0.1	45	2.3	4	1.45
S2X1P5X6X0P2	1.5	X	6	X R0.2	45	2.3	4	1.45
S2X1P5X6X0P3	1.5	X	6	X R0.3	45	2.3	4	1.45
S2X1P5X6X0P5	1.5	X	6	X R0.5	45	2.3	4	1.45
S2X1P5X8XP05	1.5	X	8	X R0.05	45	2.3	4	1.45
S2X1P5X8X0P1	1.5	X	8	X R0.1	45	2.3	4	1.45
S2X1P5X8X0P2	1.5	X	8	X R0.2	45	2.3	4	1.45
S2X1P5X8X0P3	1.5	X	8	X R0.3	45	2.3	4	1.45
S2X1P5X8X0P5	1.5	X	8	X R0.5	45	2.3	4	1.45
S2X1P5X10XP05	1.5	X	10	X R0.05	45	2.3	4	1.45
S2X1P5X10X0P1	1.5	X	10	X R0.1	45	2.3	4	1.45
S2X1P5X10X0P2	1.5	X	10	X R0.2	45	2.3	4	1.45
S2X1P5X10X0P3	1.5	X	10	X R0.3	45	2.3	4	1.45
S2X1P5X10X0P5	1.5	X	10	X R0.5	45	2.3	4	1.45
S2X1P5X12XP05	1.5	X	12	X R0.05	45	2.3	4	1.45
S2X1P5X12X0P1	1.5	X	12	X R0.1	45	2.3	4	1.45
S2X1P5X12X0P2	1.5	X	12	X R0.2	45	2.3	4	1.45
S2X1P5X12X0P3	1.5	X	12	X R0.3	45	2.3	4	1.45
S2X1P5X12X0P5	1.5	X	12	X R0.5	45	2.3	4	1.45

## S2 / 2날 롱넥 코너R



- Cu · SUS · 45C ~ 50HRC에서 탁월한 성능 발휘!
- 新 RADIA 코팅 적용으로 高품질 · 長수명 실현!
- 코너 래디우스 FACET Shape 적용으로 공구강성 극대화

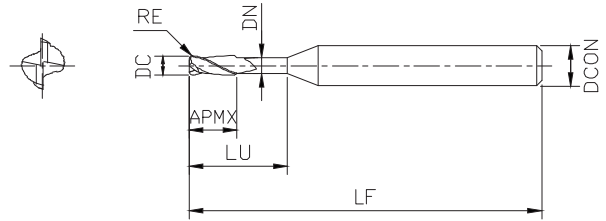


주문번호 EDP No.	외경 X 유효장 X 코너R DC X LU X RE				전장 LF	날길이 APMX	자루경 DCON	목부경 DN
S2X1P5X14XP05	1.5	X	14	X R0.05	50	2.3	4	1.45
S2X1P5X14X0P1	1.5	X	14	X R0.1	50	2.3	4	1.45
S2X1P5X14X0P2	1.5	X	14	X R0.2	50	2.3	4	1.45
S2X1P5X14X0P3	1.5	X	14	X R0.3	50	2.3	4	1.45
S2X1P5X14X0P5	1.5	X	14	X R0.5	50	2.3	4	1.45
S2X1P5X16XP05	1.5	X	16	X R0.05	50	2.3	4	1.45
S2X1P5X16X0P1	1.5	X	16	X R0.1	50	2.3	4	1.45
S2X1P5X16X0P2	1.5	X	16	X R0.2	50	2.3	4	1.45
S2X1P5X16X0P3	1.5	X	16	X R0.3	50	2.3	4	1.45
S2X1P5X16X0P5	1.5	X	16	X R0.5	50	2.3	4	1.45
S2X1P5X20XP05	1.5	X	20	X R0.05	55	2.3	4	1.45
S2X1P5X20X0P1	1.5	X	20	X R0.1	55	2.3	4	1.45
S2X1P5X20X0P2	1.5	X	20	X R0.2	55	2.3	4	1.45
S2X1P5X20X0P3	1.5	X	20	X R0.3	55	2.3	4	1.45
S2X1P5X20X0P5	1.5	X	20	X R0.5	55	2.3	4	1.45
S2X2X6X0P1	2	X	6	X R0.1	45	3	4	1.95
S2X2X6X0P2	2	X	6	X R0.2	45	3	4	1.95
S2X2X6X0P3	2	X	6	X R0.3	45	3	4	1.95
S2X2X6X0P5	2	X	6	X R0.5	45	3	4	1.95
S2X2X8X0P1	2	X	8	X R0.1	45	3	4	1.95
S2X2X8X0P2	2	X	8	X R0.2	45	3	4	1.95
S2X2X8X0P3	2	X	8	X R0.3	45	3	4	1.95
S2X2X8X0P5	2	X	8	X R0.5	45	3	4	1.95
S2X2X10X0P1	2	X	10	X R0.1	45	3	4	1.95
S2X2X10X0P2	2	X	10	X R0.2	45	3	4	1.95
S2X2X10X0P3	2	X	10	X R0.3	45	3	4	1.95
S2X2X10X0P5	2	X	10	X R0.5	45	3	4	1.95
S2X2X12X0P1	2	X	12	X R0.1	45	3	4	1.95
S2X2X12X0P2	2	X	12	X R0.2	45	3	4	1.95
S2X2X12X0P3X	2	X	12	X R0.3	45	3	4	1.95
S2X2X12X0P5	2	X	12	X R0.5	45	3	4	1.95
S2X2X14X0P1	2	X	14	X R0.1	50	3	4	1.95
S2X2X14X0P2	2	X	14	X R0.2	50	3	4	1.95
S2X2X14X0P3	2	X	14	X R0.3	50	3	4	1.95
S2X2X14X0P5	2	X	14	X R0.5	50	3	4	1.95
S2X2X16X0P2	2	X	16	X R0.2	50	3	4	1.95
S2X2X16X0P3	2	X	16	X R0.3	50	3	4	1.95
S2X2X16X0P5	2	X	16	X R0.5	50	3	4	1.95
S2X2X20X0P1	2	X	20	X R0.1	55	3	4	1.95
S2X2X20X0P2	2	X	20	X R0.2	55	3	4	1.95

## S2 / 2날 롱넥 코너R



- Cu · SUS · 45C ~ 50HRC에서 탁월한 성능 발휘!
- 新 RADIA 코팅 적용으로 高품질 · 長수명 실현!
- 코너 래디우스 FACET Shape 적용으로 공구강성 극대화

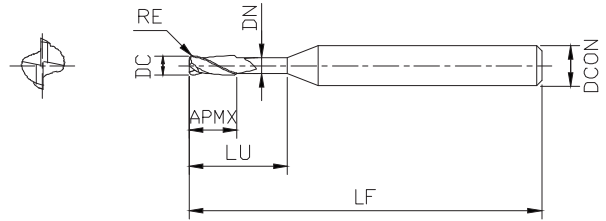

주문번호 EDP No.	외경 X 유효장 X 코너R DC X LU X RE				전장 LF	날길이 APMX	자루경 DCON	목부경 DN
S2X2X20X0P3	2	X	20	X R0.3	55	3	4	1.95
S2X2X20X0P5	2	X	20	X R0.5	55	3	4	1.95
S2X2X26X0P1	2	X	26	X R0.1	60	3	4	1.95
S2X2X26X0P2	2	X	26	X R0.2	60	3	4	1.95
S2X2X26X0P3	2	X	26	X R0.3	60	3	4	1.95
S2X2X26X0P5	2	X	26	X R0.5	60	3	4	1.95
S2X2X30X0P1	2	X	30	X R0.1	70	3	4	1.95
S2X2X30X0P2	2	X	30	X R0.2	70	3	4	1.95
S2X2X30X0P3	2	X	30	X R0.3	70	3	4	1.95
S2X2X30X0P5	2	X	30	X R0.5	70	3	4	1.95
S2X2P5X8X0P1	2.5	X	8	X R0.1	45	3.7	4	2.45
S2X2P5X8X0P2	2.5	X	8	X R0.2	45	3.7	4	2.45
S2X2P5X8X0P3	2.5	X	8	X R0.3	45	3.7	4	2.45
S2X2P5X8X0P5	2.5	X	8	X R0.5	45	3.7	4	2.45
S2X2P5X10X0P1	2.5	X	10	X R0.1	45	3.7	4	2.45
S2X2P5X10X0P2	2.5	X	10	X R0.2	45	3.7	4	2.45
S2X2P5X10X0P3	2.5	X	10	X R0.3	45	3.7	4	2.45
S2X2P5X10X0P5	2.5	X	10	X R0.5	45	3.7	4	2.45
S2X2P5X12X0P1	2.5	X	12	X R0.1	45	3.7	4	2.45
S2X2P5X12X0P2	2.5	X	12	X R0.2	45	3.7	4	2.45
S2X2P5X12X0P3	2.5	X	12	X R0.3	45	3.7	4	2.45
S2X2P5X12X0P5	2.5	X	12	X R0.5	45	3.7	4	2.45
S2X2P5X14X0P1	2.5	X	14	X R0.1	50	3.7	4	2.45
S2X2P5X14X0P2	2.5	X	14	X R0.2	50	3.7	4	2.45
S2X2P5X14X0P3	2.5	X	14	X R0.3	50	3.7	4	2.45
S2X2P5X14X0P5	2.5	X	14	X R0.5	50	3.7	4	2.45
S2X2P5X16X0P1	2.5	X	16	X R0.1	50	3.7	4	2.45
S2X2P5X16X0P2	2.5	X	16	X R0.2	50	3.7	4	2.45
S2X2P5X16X0P3	2.5	X	16	X R0.3	50	3.7	4	2.45
S2X2P5X16X0P5	2.5	X	16	X R0.5	50	3.7	4	2.45
S2X2P5X20X0P1	2.5	X	20	X R0.1	55	3.7	4	2.45
S2X2P5X20X0P2	2.5	X	20	X R0.2	55	3.7	4	2.45
S2X2P5X20X0P3	2.5	X	20	X R0.3	55	3.7	4	2.45
S2X2P5X20X0P5	2.5	X	20	X R0.5	55	3.7	4	2.45
S2X2P5X26X0P1	2.5	X	26	X R0.1	60	3.7	4	2.45
S2X2P5X26X0P2	2.5	X	26	X R0.2	60	3.7	4	2.45
S2X2P5X26X0P3	2.5	X	26	X R0.3	60	3.7	4	2.45
S2X2P5X26X0P5	2.5	X	26	X R0.5	60	3.7	4	2.45
S2X2P5X30X0P1	2.5	X	30	X R0.1	70	3.7	4	2.45
S2X2P5X30X0P2	2.5	X	30	X R0.2	70	3.7	4	2.45

제품 특징

STEEL-PRO

STEEL-PRO+


절삭 조건



## S2 / 2날 롱넥 코너R



- Cu · SUS · 45C ~ 50HRC에서 탁월한 성능 발휘!
- 新 RADIA 코팅 적용으로 高품질 · 長수명 실현!
- 코너 래디우스 FACET Shape 적용으로 공구강성 극대화

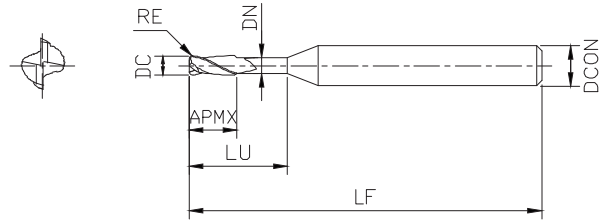


주문번호 EDP No.	외경 X 유효장 X 코너R DC X LU X RE				전장 LF	날길이 APMX	자루경 DCON	목부경 DN
S2X2P5X30X0P3	2.5	X	30	X R0.3	70	3.7	4	2.45
S2X2P5X30X0P5	2.5	X	30	X R0.5	70	3.7	4	2.45
S2X3X8X0P1	3	X	8	X R0.1	45	4.5	6	2.85
S2X3X8X0P2	3	X	8	X R0.2	45	4.5	6	2.85
S2X3X8X0P3	3	X	8	X R0.3	45	4.5	6	2.85
S2X3X8X0P5	3	X	8	X R0.5	45	4.5	6	2.85
S2X3X8X1	3	X	8	X R1.0	45	4.5	6	2.85
S2X3X10X0P1	3	X	10	X R0.1	45	4.5	6	2.85
S2X3X10X0P2	3	X	10	X R0.2	45	4.5	6	2.85
S2X3X10X0P3	3	X	10	X R0.3	45	4.5	6	2.85
S2X3X10X0P5	3	X	10	X R0.5	45	4.5	6	2.85
S2X3X10X1	3	X	10	X R1.0	45	4.5	6	2.85
S2X3X12X0P1	3	X	12	X R0.1	45	4.5	6	2.85
S2X3X12X0P2	3	X	12	X R0.2	45	4.5	6	2.85
S2X3X12X0P3	3	X	12	X R0.3	45	4.5	6	2.85
S2X3X12X0P5	3	X	12	X R0.5	45	4.5	6	2.85
S2X3X12X1	3	X	12	X R1.0	45	4.5	6	2.85
S2X3X14X0P1	3	X	14	X R0.1	50	4.5	6	2.85
S2X3X14X0P2	3	X	14	X R0.2	50	4.5	6	2.85
S2X3X14X0P3	3	X	14	X R0.3	50	4.5	6	2.85
S2X3X14X0P5	3	X	14	X R0.5	50	4.5	6	2.85
S2X3X14X1	3	X	14	X R1.0	50	4.5	6	2.85
S2X3X16X0P1	3	X	16	X R0.1	55	4.5	6	2.85
S2X3X16X0P2	3	X	16	X R0.2	55	4.5	6	2.85
S2X3X16X0P3	3	X	16	X R0.3	55	4.5	6	2.85
S2X3X16X0P5	3	X	16	X R0.5	55	4.5	6	2.85
S2X3X16X1	3	X	16	X R1.0	55	4.5	6	2.85
S2X3X20X0P1	3	X	20	X R0.1	60	4.5	6	2.85
S2X3X20X0P2	3	X	20	X R0.2	60	4.5	6	2.85
S2X3X20X0P3	3	X	20	X R0.3	60	4.5	6	2.85
S2X3X20X0P5	3	X	20	X R0.5	60	4.5	6	2.85
S2X3X20X1	3	X	20	X R1.0	60	4.5	6	2.85
S2X3X26X0P1	3	X	26	X R0.1	65	4.5	6	2.85
S2X3X26X0P2	3	X	26	X R0.2	65	4.5	6	2.85
S2X3X26X0P3	3	X	26	X R0.3	65	4.5	6	2.85
S2X3X26X0P5	3	X	26	X R0.5	65	4.5	6	2.85
S2X3X26X1	3	X	26	X R1.0	65	4.5	6	2.85
S2X3X30X0P1	3	X	30	X R0.1	80	4.5	6	2.85
S2X3X30X0P2	3	X	30	X R0.2	80	4.5	6	2.85
S2X3X30X0P3	3	X	30	X R0.3	80	4.5	6	2.85

## S2 / 2날 롱넥 코너R



- Cu · SUS · 45C ~ 50HRC에서 탁월한 성능 발휘!
- 新 RADIA 코팅 적용으로 高품질 · 長수명 실현!
- 코너 래디우스 FACET Shape 적용으로 공구강성 극대화

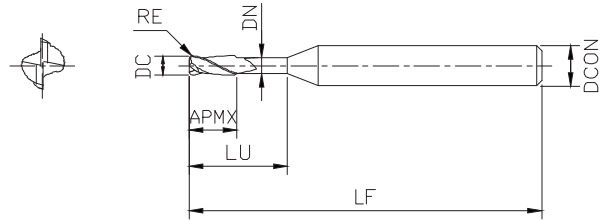


주문번호 EDP No.	외경 X 유효장 X 코너R DC X LU X RE				전장 LF	날길이 APMX	자루경 DCON	목부경 DN
S2X3X30X0P5	3	X	30	X R0.5	80	4.5	6	2.85
S2X3X30X1	3	X	30	X R1.0	80	4.5	6	2.85
S2X3X35X0P1	3	X	35	X R0.1	90	4.5	6	2.85
S2X3X35X0P2	3	X	35	X R0.2	90	4.5	6	2.85
S2X3X35X0P3	3	X	35	X R0.3	90	4.5	6	2.85
S2X3X35X0P5	3	X	35	X R0.5	90	4.5	6	2.85
S2X3X35X1	3	X	35	X R1.0	90	4.5	6	2.85
S2X3X40X0P1	3	X	40	X R0.1	90	4.5	6	2.85
S2X3X40X0P2	3	X	40	X R0.2	90	4.5	6	2.85
S2X3X40X0P3	3	X	40	X R0.3	90	4.5	6	2.85
S2X3X40X0P5	3	X	40	X R0.5	90	4.5	6	2.85
S2X3X40X1	3	X	40	X R1.0	90	4.5	6	2.85
S2X4X10X0P1	4	X	10	X R0.1	45	6	6	3.85
S2X4X10X0P2	4	X	10	X R0.2	45	6	6	3.85
S2X4X10X0P3	4	X	10	X R0.3	45	6	6	3.85
S2X4X10X0P5	4	X	10	X R0.5	45	6	6	3.85
S2X4X10X1	4	X	10	X R1.0	45	6	6	3.85
S2X4X12X0P1	4	X	12	X R0.1	50	6	6	3.85
S2X4X12X0P2	4	X	12	X R0.2	50	6	6	3.85
S2X4X12X0P3	4	X	12	X R0.3	50	6	6	3.85
S2X4X12X0P5	4	X	12	X R0.5	50	6	6	3.85
S2X4X12X1	4	X	12	X R1.0	50	6	6	3.85
S2X4X14X0P1	4	X	14	X R0.1	60	6	6	3.85
S2X4X14X0P2	4	X	14	X R0.2	60	6	6	3.85
S2X4X14X0P3	4	X	14	X R0.3	60	6	6	3.85
S2X4X14X0P5	4	X	14	X R0.5	60	6	6	3.85
S2X4X14X1	4	X	14	X R1.0	60	6	6	3.85
S2X4X16X0P1	4	X	16	X R0.1	60	6	6	3.85
S2X4X16X0P2	4	X	16	X R0.2	60	6	6	3.85
S2X4X16X0P3	4	X	16	X R0.3	60	6	6	3.85
S2X4X16X0P5	4	X	16	X R0.5	60	6	6	3.85
S2X4X16X1	4	X	16	X R1.0	60	6	6	3.85
S2X4X20X0P1	4	X	20	X R0.1	60	6	6	3.85
S2X4X20X0P2	4	X	20	X R0.2	60	6	6	3.85
S2X4X20X0P3	4	X	20	X R0.3	60	6	6	3.85
S2X4X20X0P5	4	X	20	X R0.5	60	6	6	3.85
S2X4X20X1	4	X	20	X R1.0	60	6	6	3.85
S2X4X26X0P1	4	X	26	X R0.1	70	6	6	3.85
S2X4X26X0P2	4	X	26	X R0.2	70	6	6	3.85
S2X4X26X0P3	4	X	26	X R0.3	70	6	6	3.85



## S2 / 2날 롱넥 코너R



- Cu · SUS · 45C ~ 50HRC에서 탁월한 성능 발휘!
- 新 RADIA 코팅 적용으로 高품질 · 長수명 실현!
- 코너 래디우스 FACET Shape 적용으로 공구강성 극대화

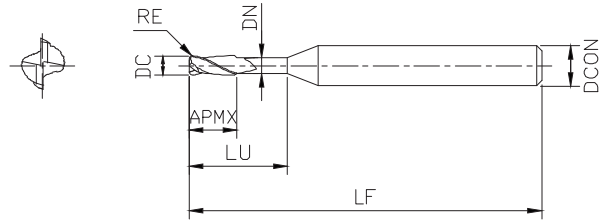


주문번호 EDP No.	외경 X 유효장 X 코너R DC X LU X RE				전장 LF	날길이 APMX	자루경 DCON	목부경 DN
S2X4X26X0P5	4	X	26	X R0.5	70	6	6	3.85
S2X4X26X1	4	X	26	X R1.0	70	6	6	3.85
S2X4X30X0P1	4	X	30	X R0.1	80	6	6	3.85
S2X4X30X0P2	4	X	30	X R0.2	80	6	6	3.85
S2X4X30X0P3	4	X	30	X R0.3	80	6	6	3.85
S2X4X30X0P5	4	X	30	X R0.5	80	6	6	3.85
S2X4X30X1	4	X	30	X R1.0	80	6	6	3.85
S2X4X35X0P1	4	X	35	X R0.1	90	6	6	3.85
S2X4X35X0P2	4	X	35	X R0.2	90	6	6	3.85
S2X4X35X0P3	4	X	35	X R0.3	90	6	6	3.85
S2X4X35X0P5	4	X	35	X R0.5	90	6	6	3.85
S2X4X35X1	4	X	35	X R1.0	90	6	6	3.85
S2X4X40X0P1	4	X	40	X R0.1	90	6	6	3.85
S2X4X40X0P2	4	X	40	X R0.2	90	6	6	3.85
S2X4X40X0P3	4	X	40	X R0.3	90	6	6	3.85
S2X4X40X0P5	4	X	40	X R0.5	90	6	6	3.85
S2X4X40X1	4	X	40	X R1.0	90	6	6	3.85
S2X4X45X0P1	4	X	45	X R0.1	100	6	6	3.85
S2X4X45X0P2	4	X	45	X R0.2	100	6	6	3.85
S2X4X45X0P3	4	X	45	X R0.3	100	6	6	3.85
S2X4X45X0P5	4	X	45	X R0.5	100	6	6	3.85
S2X4X45X1	4	X	45	X R1.0	100	6	6	3.85
S2X4X50X0P1	4	X	50	X R0.1	100	6	6	3.85
S2X4X50X0P2	4	X	50	X R0.2	100	6	6	3.85
S2X4X50X0P3	4	X	50	X R0.3	100	6	6	3.85
S2X4X50X0P5	4	X	50	X R0.5	100	6	6	3.85
S2X4X50X1	4	X	50	X R1.0	100	6	6	3.85
S2X6X20X0P1	6	X	20	X R0.1	60	9	6	5.85
S2X6X20X0P2	6	X	20	X R0.2	60	9	6	5.85
S2X6X20X0P3	6	X	20	X R0.3	60	9	6	5.85
S2X6X20X0P5	6	X	20	X R0.5	60	9	6	5.85
S2X6X20X1	6	X	20	X R1.0	60	9	6	5.85
S2X6X20X1P5	6	X	20	X R1.5	60	9	6	5.85
S2X6X20X2	6	X	20	X R2.0	60	9	6	5.85
S2X6X30X0P3	6	X	30	X R0.3	70	15	6	5.85
S2X6X30X0P5	6	X	30	X R0.5	70	15	6	5.85
S2X6X30X1	6	X	30	X R1.0	70	15	6	5.85
S2X8X25X0P1	8	X	25	X R0.1	70	12	8	7.7
S2X8X25X0P2	8	X	25	X R0.2	70	12	8	7.7
S2X8X25X0P3	8	X	25	X R0.3	70	12	8	7.7

## S2 / 2날 롱넥 코너R



- Cu · SUS · 45C ~ 50HRC에서 탁월한 성능 발휘!
- 新 RADIA 코팅 적용으로 高품질 · 長수명 실현!
- 코너 래디우스 FACET Shape 적용으로 공구강성 극대화

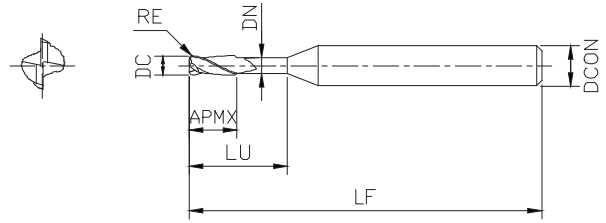

주문번호 EDP No.	외경 X 유효장 X 코너R DC X LU X RE				전장 LF	날길이 APMX	자루경 DCON	목부경 DN
S2X8X25X0P5	8	X	25	X R0.5	70	12	8	7.7
S2X8X25X1	8	X	25	X R1.0	70	12	8	7.7
S2X8X25X1P5	8	X	25	X R1.5	70	12	8	7.7
S2X8X25X2	8	X	25	X R2.0	70	12	8	7.7
S2X8X35X0P5	8	X	35	X R0.5	100	20	8	7.7
S2X10X30X0P1	10	X	30	X R0.1	75	15	10	9.7
S2X10X30X0P2	10	X	30	X R0.2	75	15	10	9.7
S2X10X30X0P3	10	X	30	X R0.3	75	15	10	9.7
S2X10X30X0P5	10	X	30	X R0.5	75	15	10	9.7
S2X10X30X1	10	X	30	X R1.0	75	15	10	9.7
S2X10X30X1P5	10	X	30	X R1.5	75	15	10	9.7
S2X10X30X2	10	X	30	X R2.0	75	15	10	9.7
S2X10X40X1	10	X	40	X R1	100	25	10	9.7
S2X12X50X0P3	12	X	50	X R0.3	110	20	12	11.7
S2X12X50X0P5	12	X	50	X R0.5	110	20	12	11.7
S2X12X50X1	12	X	50	X R1.0	110	20	12	11.7
S2X16X35X0P5	16	X	35	X R0.5	100	20	16	15.5
S2X16X35X1	16	X	35	X R1.0	100	20	16	15.5
S2X16X50X0P5	16	X	50	X R0.5	150	35	16	15.5
S2X16X50X1	16	X	50	X R1.0	150	35	16	15.5
S2X20X40X0P5	20	X	40	X R0.5	100	25	20	19.5
S2X20X40X1	20	X	40	X R1.0	100	25	20	19.5
S2X20X55X0P5	20	X	55	X R0.5	150	40	20	19.5
S2X20X55X1	20	X	55	X R1.0	150	40	20	19.5

제품 특징

STEEL-PRO

STEEL-PRO+

절삭 조건