


## SPP2B / 2날 볼

CARBIDE	DUROREY	R ±0.005 RE<3	R 0~0.010 3≤RE≤6	R ±0.01 6<RE	SHRINK FIT	30°	SPEED FEED P50
---------	---------	---------------------	------------------------	--------------------	---------------	-----	----------------------



- 30HRC ~ 50HRC 고경도 및 열처리강에서 탁월한 성능 발휘!
- 新 DUROREY 코팅 적용으로 高품질 · 長수명 실현!
- 매끄러운 인선부 처리로 부드럽고 안정된 절삭!

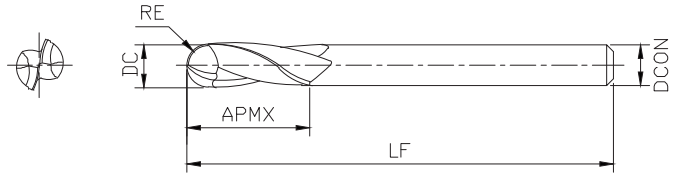

주문번호 EDP No.	반지름 X 외경 RE X DC	전장 LF	날길이 APMX	자루경 DCON
SPP2BX0P4X0P8	R0.2 X 0.4	40	0.8	4
SPP2BX0P6X1P2	R0.3 X 0.6	40	1.2	4
SPP2BX0P8X1P6	R0.4 X 0.8	40	1.6	4
SPP2BX1X2P5	R0.5 X 1	50	2.5	6
SPP2BX2X5	R1 X 2	50	5	6
SPP2BX3X6	R1.5 X 3	60	6	6
SPP2BX4X8	R2 X 4	70	8	6
SPP2BX6X12	R3 X 6	90	12	6
SPP2BX8X14	R4 X 8	100	14	8
SPP2BX10X18	R5 X 10	100	18	10
SPP2BX12X22	R6 X 12	110	22	12

제품 특징

STEEL-PRO

STEEL-PRO+

절삭 조건