


S4 / 4날 롱넥 코너R



- Cu · SUS · 45C ~ 50HRC에서 탁월한 성능 발휘!
- 新 RADIA 코팅 적용으로 高품질 · 長수명 실현!
- 코너 래디우스 FACET Shape 적용으로 공구강성 극대화

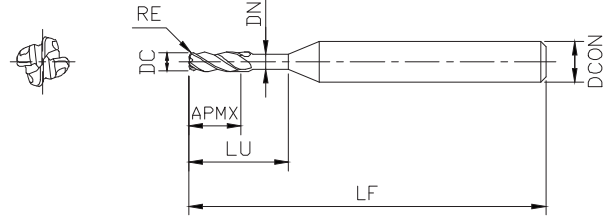


주문번호 EDP No.	외경 X 유효장 X 코너R DC X LU X RE				전장 LF	날길이 APMX	자루경 DCON	목부경 DN
S4X1X6X0P2	1	X	6	X R0.2	45	1.5	4	0.95
S4X1X8X0P1	1	X	8	X R0.1	45	1.5	4	0.95
S4X1P5X8X0P2	1.5	X	8	X R0.2	45	2.3	4	1.45
S4X1P5X10X0P2	1.5	X	10	X R0.2	45	2.3	4	1.45
S4X1P5X10X0P5	1.5	X	10	X R0.5	45	2.3	4	1.45
S4X1P5X12X0P1	1.5	X	12	X R0.1	45	2.3	4	1.45
S4X1P5X12X0P2	1.5	X	12	X R0.2	45	2.3	4	1.45
S4X1P5X12X0P5	1.5	X	12	X R0.5	45	2.3	4	1.45
S4X2X8X0P5	2	X	8	X R0.5	45	3	4	1.95
S4X2X10X0P2	2	X	10	X R0.2	45	3	4	1.95
S4X2X10X0P5	2	X	10	X R0.5	45	3	4	1.95
S4X2X12X0P2	2	X	12	X R0.2	45	3	4	1.95
S4X2X12X0P5	2	X	12	X R0.5	45	3	4	1.95
S4X2X16X0P5	2	X	16	X R0.5	50	3	4	1.95
S4X2X20X0P5	2	X	20	X R0.5	55	3	4	1.95
S4X3X10X0P5	3	X	10	X R0.5	45	4.5	6	2.85
S4X3X12X0P2	3	X	12	X R0.2	45	4.5	6	2.85
S4X3X12X0P5	3	X	12	X R0.5	45	4.5	6	2.85
S4X3X16X0P2	3	X	16	X R0.2	55	4.5	6	2.85
S4X3X16X0P5	3	X	16	X R0.5	55	4.5	6	2.85
S4X3X20X0P5	3	X	20	X R0.5	60	4.5	6	2.85
S4X3X26X0P5	3	X	26	X R0.5	65	4.5	6	2.85
S4X3X30X0P5	3	X	30	X R0.5	80	4.5	6	2.85
S4X4X10X0P1	4	X	10	X R0.1	45	6	6	3.85
S4X4X10X0P2	4	X	10	X R0.2	45	6	6	3.85
S4X4X10X0P3	4	X	10	X R0.3	45	6	6	3.85
S4X4X10X0P5	4	X	10	X R0.5	45	6	6	3.85
S4X4X10X1	4	X	10	X R1.0	45	6	6	3.85
S4X4X12X0P1	4	X	12	X R0.1	50	6	6	3.85
S4X4X12X0P2	4	X	12	X R0.2	50	6	6	3.85
S4X4X12X0P3	4	X	12	X R0.3	50	6	6	3.85
S4X4X12X0P5	4	X	12	X R0.5	50	6	6	3.85
S4X4X12X1	4	X	12	X R1.0	50	6	6	3.85
S4X4X14X0P1	4	X	14	X R0.1	60	6	6	3.85
S4X4X14X0P2	4	X	14	X R0.2	60	6	6	3.85
S4X4X14X0P3	4	X	14	X R0.3	60	6	6	3.85
S4X4X14X0P5	4	X	14	X R0.5	60	6	6	3.85
S4X4X14X1	4	X	14	X R1.0	60	6	6	3.85
S4X4X16X0P1	4	X	16	X R0.1	60	6	6	3.85
S4X4X16X0P2	4	X	16	X R0.2	60	6	6	3.85

S4 / 4날 롱넥 코너R



- Cu · SUS · 45C ~ 50HRC에서 탁월한 성능 발휘!
- 新 RADIA 코팅 적용으로 高품질 · 長수명 실현!
- 코너 래디우스 FACET Shape 적용으로 공구강성 극대화

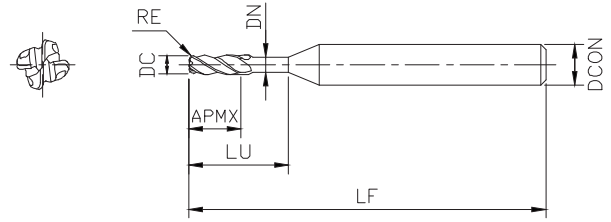


주문번호 EDP No.	외경 X 유효장 X 코너R DC X LU X RE				전장 LF	날길이 APMX	자루경 DCON	목부경 DN
S4X4X16X0P3	4	X	16	X R0.3	60	6	6	3.85
S4X4X16X0P5	4	X	16	X R0.5	60	6	6	3.85
S4X4X16X1	4	X	16	X R1.0	60	6	6	3.85
S4X4X20X0P1	4	X	20	X R0.1	60	6	6	3.85
S4X4X20X0P2	4	X	20	X R0.2	60	6	6	3.85
S4X4X20X0P3	4	X	20	X R0.3	60	6	6	3.85
S4X4X20X0P5	4	X	20	X R0.5	60	6	6	3.85
S4X4X20X1	4	X	20	X R1.0	60	6	6	3.85
S4X4X26X0P1	4	X	26	X R0.1	70	6	6	3.85
S4X4X26X0P2	4	X	26	X R0.2	70	6	6	3.85
S4X4X26X0P3	4	X	26	X R0.3	70	6	6	3.85
S4X4X26X0P5	4	X	26	X R0.5	70	6	6	3.85
S4X4X26X1	4	X	26	X R1.0	70	6	6	3.85
S4X4X30X0P1	4	X	30	X R0.1	80	6	6	3.85
S4X4X30X0P2	4	X	30	X R0.2	80	6	6	3.85
S4X4X30X0P3	4	X	30	X R0.3	80	6	6	3.85
S4X4X30X0P5	4	X	30	X R0.5	80	6	6	3.85
S4X4X30X1	4	X	30	X R1.0	80	6	6	3.85
S4X4X35X0P1	4	X	35	X R0.1	90	6	6	3.85
S4X4X35X0P2	4	X	35	X R0.2	90	6	6	3.85
S4X4X35X0P3	4	X	35	X R0.3	90	6	6	3.85
S4X4X35X0P5	4	X	35	X R0.5	90	6	6	3.85
S4X4X35X1	4	X	35	X R1.0	90	6	6	3.85
S4X4X40X0P1	4	X	40	X R0.1	90	6	6	3.85
S4X4X40X0P2	4	X	40	X R0.2	90	6	6	3.85
S4X4X40X0P3	4	X	40	X R0.3	90	6	6	3.85
S4X4X40X0P5	4	X	40	X R0.5	90	6	6	3.85
S4X4X40X1	4	X	40	X R1.0	90	6	6	3.85
S4X4X45X0P1	4	X	45	X R0.1	100	6	6	3.85
S4X4X45X0P2	4	X	45	X R0.2	100	6	6	3.85
S4X4X45X0P3	4	X	45	X R0.3	100	6	6	3.85
S4X4X45X0P5	4	X	45	X R0.5	100	6	6	3.85
S4X4X45X1	4	X	45	X R1.0	100	6	6	3.85
S4X4X50X0P1	4	X	50	X R0.1	100	6	6	3.85
S4X4X50X0P2	4	X	50	X R0.2	100	6	6	3.85
S4X4X50X0P3	4	X	50	X R0.3	100	6	6	3.85
S4X4X50X0P5	4	X	50	X R0.5	100	6	6	3.85
S4X4X50X1	4	X	50	X R1.0	100	6	6	3.85
S4X6X20X0P1	6	X	20	X R0.1	60	9	6	5.85
S4X6X20X0P2	6	X	20	X R0.2	60	9	6	5.85

S4 / 4날 롱넥 코너R



- Cu · SUS · 45C ~ 50HRC에서 탁월한 성능 발휘!
- 新 RADIA 코팅 적용으로 高품질 · 長수명 실현!
- 코너 래디우스 FACET Shape 적용으로 공구강성 극대화

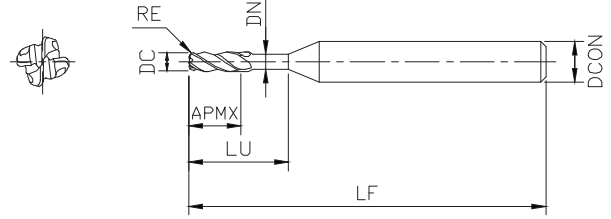

주문번호 EDP No.	외경 X 유효장 X 코너R DC X LU X RE				전장 LF	날길이 APMX	자루경 DCON	목부경 DN
S4X6X20X0P3	6	X	20	X R0.3	60	9	6	5.85
S4X6X20X0P5	6	X	20	X R0.5	60	9	6	5.85
S4X6X20X1	6	X	20	X R1.0	60	9	6	5.85
S4X6X20X1P5	6	X	20	X R1.5	60	9	6	5.85
S4X6X20X2	6	X	20	X R2.0	60	9	6	5.85
S4X6X30X0P3	6	X	30	X R0.3	70	15	6	5.85
S4X6X30X0P5	6	X	30	X R0.5	70	15	6	5.85
S4X6X30X1	6	X	30	X R1.0	70	15	6	5.85
S4X8X25X0P1	8	X	25	X R0.1	70	12	8	7.7
S4X8X25X0P2	8	X	25	X R0.2	70	12	8	7.7
S4X8X25X0P3	8	X	25	X R0.3	70	12	8	7.7
S4X8X25X0P5	8	X	25	X R0.5	70	12	8	7.7
S4X8X25X1	8	X	25	X R1.0	70	12	8	7.7
S4X8X25X1P5	8	X	25	X R1.5	70	12	8	7.7
S4X8X25X2	8	X	25	X R2.0	70	12	8	7.7
S4X8X35X0P5	8	X	35	X R0.5	100	20	8	7.7
S4X8X35X1	8	X	35	X R1	100	20	8	7.7
S4X10X30X0P1	10	X	30	X R0.1	75	15	10	9.7
S4X10X30X0P2	10	X	30	X R0.2	75	15	10	9.7
S4X10X30X0P3	10	X	30	X R0.3	75	15	10	9.7
S4X10X30X0P4	10	X	30	X R0.5	75	15	10	9.7
S4X10X30X1	10	X	30	X R1.0	75	15	10	9.7
S4X10X30X1P5	10	X	30	X R1.5	75	15	10	9.7
S4X10X30X2	10	X	30	X R2.0	75	15	10	9.7
S4X10X40X0P5	10	X	40	X R0.5	100	25	10	9.7
S4X10X40X1	10	X	40	X R1	100	25	10	9.7
S4X12X50X0P3	12	X	50	X R0.3	110	20	12	11.7
S4X12X50X0P5	12	X	50	X R0.5	110	20	12	11.7
S4X12X50X1	12	X	50	X R1.0	110	20	12	11.7
S4X16X35X0P5	16	X	35	X R0.5	100	20	16	15.7
S4X16X35X1	16	X	35	X R1.0	100	20	16	15.7
S4X16X50X0P5	16	X	50	X R0.5	150	35	16	15.7
S4X16X50X1	16	X	50	X R1.0	150	35	16	15.7
S4X20X40X0P5	20	X	40	X R0.5	100	25	20	19.6
S4X20X40X1	20	X	40	X R1.0	100	25	20	19.6
S4X20X55X0P5	20	X	55	X R0.5	150	40	20	19.6
S4X20X55X1	20	X	55	X R1.0	150	40	20	19.6

제품 특징

STEEL-PRO

STEEL-PRO+

절삭 조건